




MANUFACTURING, INC.

Titan 1405 Mold Change Shuttle

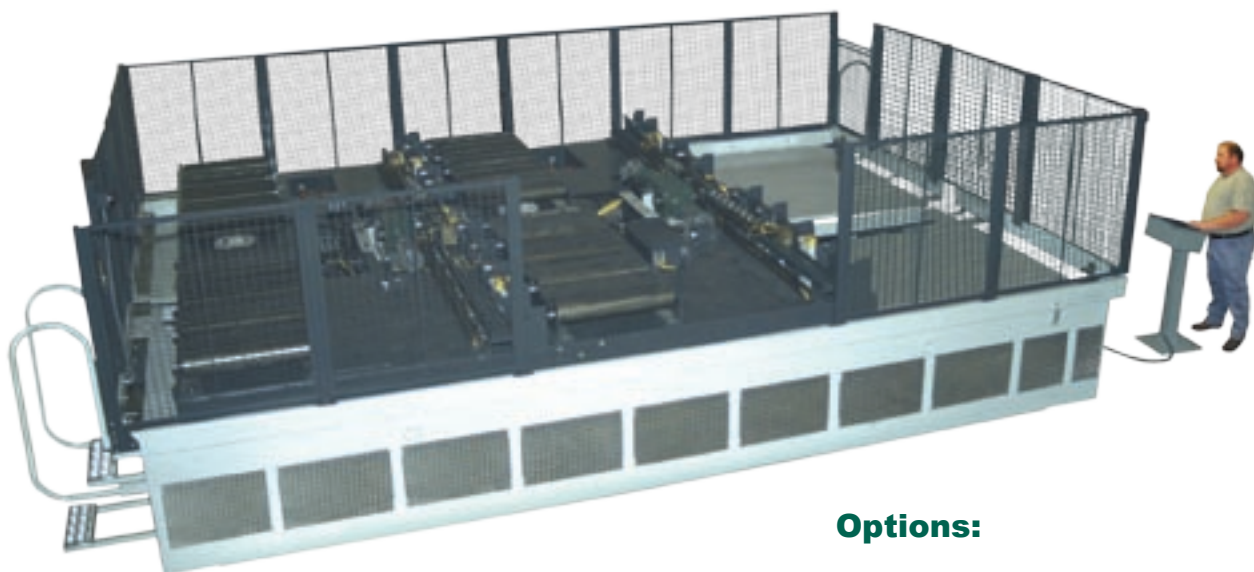


Options:

- Dual press service available
- Full perimeter interlocked safety fencing

Features:

- Mold change speed: up to 10 FPM•
Shuttle speed: 10-20 FPM
- Air supply: 250 SCFM @ 80 PSIG
- Electrical Requirements: 480VAC @ 30 AMPS
- PLC operator control panel
- Shuttle table is accurately positioned at each station
- Self-contained hydraulic pumping system
- Sub plate guide to align with stationary platen
- Differential encoder feedback on push/pull chain allows for positive positioning of mold hook.
- Hydraulically operated heavy-duty mold hook pin mounted to each chain drive. Feedback sensor on mold hook
- Hydraulic powered fail-safe mold stops for each station
- Personnel access ladder end of the base table
- Structural tube air film shuttle platform with two mold change stations
- Heavy duty 5" DIA. X 3/4 wall static roller bed with sealed cartridge type bearings
- Dual Serapid® insert/extract chain drives at each shuttle platform station

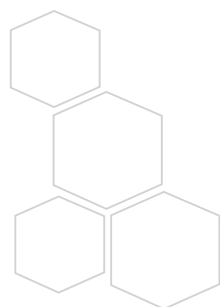

2 x 100,000 lbs. Capacity